

|                                                                                   |           |              |            |
|-----------------------------------------------------------------------------------|-----------|--------------|------------|
|  | Datasheet | No.          | DS10-E008  |
|                                                                                   |           | Initial Date | 2010-07-29 |
| OE                                                                                | OEB6Cxx41 | Written Team | R&D Dept.  |
|                                                                                   |           |              | GH Zheng   |

## I Preview

|             |                                              |
|-------------|----------------------------------------------|
| PN          | OEB6Cxx41                                    |
| Description | SFP+ Bi-Di 1270nm/1310nm 10KMLC DDMI 0~70 °C |

## II Contents

1. Features
2. Applications
3. Description
4. Absolute maximum Ratings
5. Operating Environment
6. Optical and Electrical Characteristics
7. Timing and Electrical
8. Diagnostics
9. Digital Diagnostic Memory Map
10. Pin Descriptions
11. Recommended Interface Circuit
12. Mechanical Dimensions
13. Model Ordering Information

## III Revision History

| No. | Date       | Items | Change Recording     | Ver. | Rev. | Customer |
|-----|------------|-------|----------------------|------|------|----------|
| 1   | 2010-07-29 | All   | Initial registration | 000  | 000  | Standard |
| 2   |            |       |                      |      |      |          |
| 3   |            |       |                      |      |      |          |
| 4   |            |       |                      |      |      |          |
| 5   |            |       |                      |      |      |          |
| 6   |            |       |                      |      |      |          |

|                                                                                                               |           |                                |                                    |       |
|---------------------------------------------------------------------------------------------------------------|-----------|--------------------------------|------------------------------------|-------|
| <br>CRE Communication Limited | Datasheet |                                | DS10-E008<br>Final Rev.:2010.07.29 |       |
|                                                                                                               | Product   | SFP+ transceiver<br>OE serials | Ver.                               | 000   |
|                                                                                                               | Part No.  | OEB6Cxx41                      | Rev.                               | 000   |
|                                                                                                               |           |                                | Page                               | 2 / 8 |

### 1. Features:


- ◆ Supports up to 10.7Gbps bit rates
- ◆ Hot-pluggable SFP+ footprint
- ◆ 1330/1270nm DFB laser and PIN photodiode, Up to 10km for SMF transmission
- ◆ Compliant with SFP+ MSA and SFF-8472 with duplex LC receptacle
- ◆ Compatible with RoHS
- ◆ Single +3.3V power supply
- ◆ Real Time Digital Diagnostic Monitoring
- ◆ Operating case temperature:
- ◆ Standard: 0 to +70°C
- ◆ Industrial: -40 to +85°C

### 2. Applications:

- ◆ 10Gbps Optical systems
- ◆ 10GBASE-LR at 10.3125Gbps
- ◆ 10GBASE-LW at 9.953Gbps
- ◆ LTE systems
- ◆ Other Optical links

### 3. Description:

OEB6Cxx41 is high performance, cost effective modules supporting data rate of 10Gbps and 10km transmission distance with SMF. The transceiver consists of three sections: a DFB laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements. The transceivers are compatible with SFP Multi-Source Agreement and SFF-8472 digital diagnostics functions.

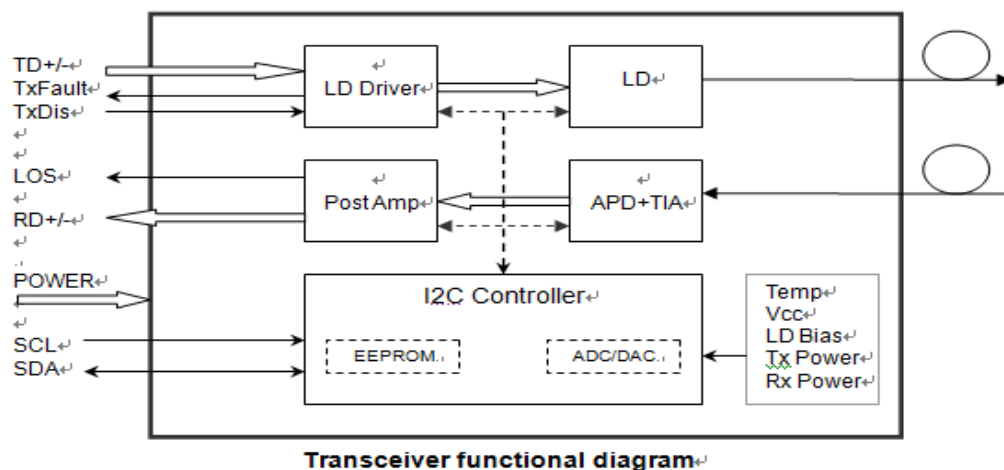

|                                                                                                                                                                                                                                     |        |       |       |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------|-------|----------|
| OCRE COMMUNICATION LIMITED<br>Web: www.ocrecom.com<br>E-Mail: sales@ocrecom.com<br>Add. Dist.A, Building 6, Bay on the six block, Xixiang,<br>Baoan Dist, Shenzhen, China 518000<br>Tel: + 86 755 2335 3855 Fax: + 86 755 2335 3855 | DESIGN | CHECK | CHECK | APPROVAL |
|                                                                                                                                                                                                                                     |        |       |       |          |

|                                                                                                           |           |                                |                                    |       |
|-----------------------------------------------------------------------------------------------------------|-----------|--------------------------------|------------------------------------|-------|
| <br>Communication Limited | Datasheet |                                | DS10-E008<br>Final Rev.:2010.07.29 |       |
|                                                                                                           | Product   | SFP+ transceiver<br>OE serials | Ver.                               | 000   |
|                                                                                                           | Part No.  | OEB6Cxx41                      | Rev.                               | 000   |
|                                                                                                           |           |                                | Page                               | 3 / 8 |

#### 4. Absolute Maximum Ratings

| Parameter           | Symbol           | Min | Max  | Unit |
|---------------------|------------------|-----|------|------|
| Storage Temperature | T <sub>ST</sub>  | -40 | +85  | °C   |
| Supply Voltage      | V <sub>CC3</sub> | 0   | +3.6 | V    |
| Relative Humidity   | RH               | 5   | 95   | %    |

#### 5. Operation Environment:

| Parameter             | Symbol          | Min   | Typ     | Max   | Unit |
|-----------------------|-----------------|-------|---------|-------|------|
| Date Rate             |                 |       | 10.3125 |       | Gb/s |
| Supply Voltage        | V <sub>CC</sub> | +3.14 | 3.3     | +3.47 | V    |
| Supply Current        | I <sub>CC</sub> |       | 380     | 450   | mA   |
| Power Dissipation     | PD              |       |         | 2     | W    |
| Operating Temperature | T <sub>OP</sub> | 0     | 25      | +70   | °C   |

#### 6. Optical and Electrical Characteristics

| Parameter                     |         | Symbol           | Min       | Typical   | Max             | Unit     | Notes |
|-------------------------------|---------|------------------|-----------|-----------|-----------------|----------|-------|
| Transmitter                   |         |                  |           |           |                 |          |       |
| Centre Wavelength             |         | $\lambda_c$      | 1320/1260 | 1330/1270 | 1340/1280       | nm       |       |
| Spectral Width (-20dB)        |         | $\Delta\lambda$  |           |           | 1               | nm       |       |
| Side-Mode Suppression Ratio   |         | SMSR             | 30        | -         |                 | dB       |       |
| Average Output Power          |         | P <sub>out</sub> | -5        |           | 0               | dBm      | 1     |
| Extinction Ratio              |         | ER               | 3.5       |           |                 | dB       |       |
| Data Input Swing Differential |         | V <sub>N</sub>   | 180       |           | 850             | mV       | 2     |
| Input Differential Impedance  |         | Z <sub>N</sub>   | 90        | 100       | 110             | $\Omega$ |       |
| TX Disable                    | Disable |                  | 20        |           | V <sub>CC</sub> | V        |       |
|                               | Enable  |                  | 0         |           | 0.8             | V        |       |
| TX Fault                      | Fault   |                  | 20        |           | V <sub>CC</sub> | V        |       |
|                               | Normal  |                  | 0         |           | 0.8             | V        |       |
| Receiver                      |         |                  |           |           |                 |          |       |
| Centre Wavelength             |         | $\lambda_c$      | 1260/1320 | 1270/1330 | 1280/1340       | nm       |       |
| Receiver Sensitivity          |         |                  |           |           | -15             | dBm      | 3     |
| Receiver Overload             |         |                  | 0.5       |           |                 | dBm      | 3     |
| LOS De-Assert                 |         | LOS <sub>D</sub> |           |           | -15.5           | dBm      |       |
| LOS Assert                    |         | LOS <sub>A</sub> | -30       |           |                 | dBm      |       |

|                                                                                                                                                                                                                                     |        |       |       |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------|-------|----------|
| OCRE COMMUNICATION LIMITED<br>Web: www.ocrecom.com<br>E-Mail: sales@ocrecom.com<br>Add. Dist.A, Building 6, Bay on the six block, Xixiang,<br>Baoan Dist, Shenzhen, China 518000<br>Tel: + 86 755 2335 3855 Fax: + 86 755 2335 3855 | DESIGN | CHECK | CHECK | APPROVAL |
|                                                                                                                                                                                                                                     |        |       |       |          |

|                                                                                                           |           |                                |                                    |       |
|-----------------------------------------------------------------------------------------------------------|-----------|--------------------------------|------------------------------------|-------|
| <br>Communication Limited | Datasheet |                                | DS10-E008<br>Final Rev.:2010.07.29 |       |
|                                                                                                           | Product   | SFP+ transceiver<br>OE serials | Ver.                               | 000   |
|                                                                                                           | Part No.  | OEB6Cxx41                      | Rev.                               | 000   |
|                                                                                                           |           |                                | Page                               | 4 / 8 |

|                                |                  |     |  |                 |    |   |
|--------------------------------|------------------|-----|--|-----------------|----|---|
| LOS Hysteresis                 |                  | 0.5 |  |                 | dB |   |
| Data Output Swing Differential | V <sub>out</sub> | 300 |  | 900             | mV | 4 |
| LOS                            | High             | 2.0 |  | V <sub>cc</sub> | V  |   |
|                                | Low              |     |  | 0.8             | V  |   |

#### Notes:

1. The optical power is launched into SMF.
2. PECL input, internally AC-coupled and terminated.
3. Measured with a PRBS 2<sup>31</sup>-1 test pattern @10312Mbps, BER ≤ 1×10<sup>-12</sup>.
4. Internally AC-coupled.

### 7. Timing and Electrical

| Parameter                                       | Symbol                    | Min | Typical | Max             | Unit |
|-------------------------------------------------|---------------------------|-----|---------|-----------------|------|
| Tx Disable Negate Time                          | t <sub>on</sub>           |     |         | 1               | ms   |
| Tx Disable Assert Time                          | t <sub>off</sub>          |     |         | 10              | μs   |
| Time To Initialize, including Reset of Tx Fault | t <sub>init</sub>         |     |         | 300             | ms   |
| Tx Fault Assert Time                            | t <sub>fault</sub>        |     |         | 100             | μs   |
| Tx Disable To Reset                             | t <sub>reset</sub>        | 10  |         |                 | μs   |
| LOS Assert Time                                 | t <sub>loss_on</sub>      |     |         | 100             | μs   |
| LOS De-assert Time                              | t <sub>loss_off</sub>     |     |         | 100             | μs   |
| Serial ID Clock Rate                            | f <sub>serial_clock</sub> |     | 100     | 400             | KHz  |
| MOD_DEF (0:2)-High                              | V <sub>H</sub>            | 2   |         | V <sub>cc</sub> | V    |
| MOD_DEF (0:2)-Low                               | V <sub>L</sub>            |     |         | 0.8             | V    |

### 8. Diagnostics

| Parameter    | Range      | Unit | Accuracy | Calibration |
|--------------|------------|------|----------|-------------|
| Temperature  | 0 to +70   | °C   | ±3°C     | Internal    |
| Voltage      | 3.0 to 3.6 | V    | ±3%      | Internal    |
| Bias Current | 0 to 100   | mA   | ±10%     | Internal    |


|                                                                                                                                                                                                                                     |        |       |       |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------|-------|----------|
| OCRE COMMUNICATION LIMITED<br>Web: www.ocrecom.com<br>E-Mail: sales@ocrecom.com<br>Add. Dist.A, Building 6, Bay on the six block, Xixiang,<br>Baoan Dist, Shenzhen, China 518000<br>Tel: + 86 755 2335 3855 Fax: + 86 755 2335 3855 | DESIGN | CHECK | CHECK | APPROVAL |
|                                                                                                                                                                                                                                     |        |       |       |          |

|                                                                                                           |           |                                |                                    |       |
|-----------------------------------------------------------------------------------------------------------|-----------|--------------------------------|------------------------------------|-------|
| <br>Communication Limited | Datasheet |                                | DS10-E008<br>Final Rev.:2010.07.29 |       |
|                                                                                                           | Product   | SFP+ transceiver<br>OE serials | Ver.                               | 000   |
|                                                                                                           | Part No.  | OEB6Cxx41                      | Rev.                               | 000   |
|                                                                                                           |           |                                | Page                               | 5 / 8 |

|          |          |     |      |          |
|----------|----------|-----|------|----------|
| TX Power | -5 to 0  | dBm | ±3dB | Internal |
| RX Power | -15 to 1 | dBm | ±3dB | Internal |

## 9. Digital Diagnostic Memory Map


The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA). The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring. The digital diagnostic memory map specific data field defines as following.

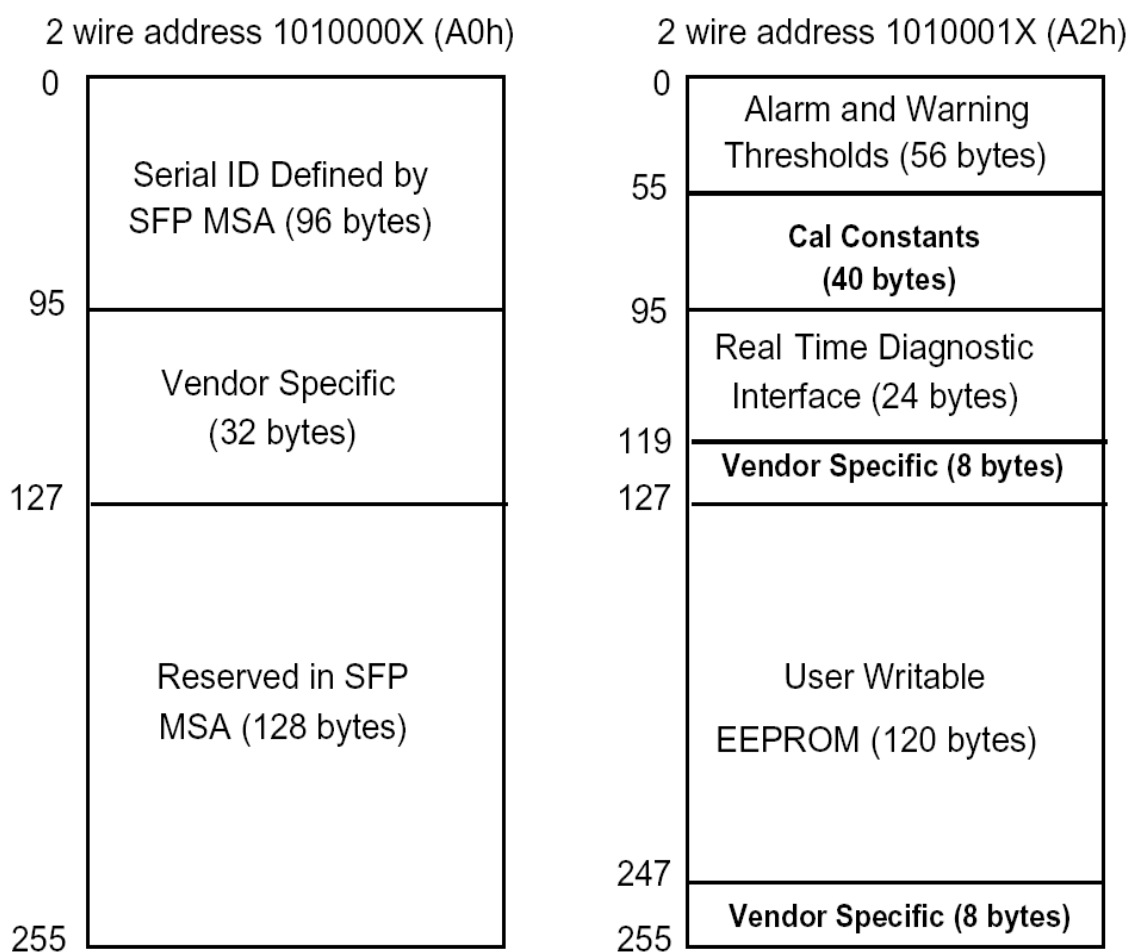

|                                                                                                                                                                                                                                     |        |       |       |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------|-------|----------|
| OCRE COMMUNICATION LIMITED<br>Web: www.ocrecom.com<br>E-Mail: sales@ocrecom.com<br>Add. Dist.A, Building 6, Bay on the six block, Xixiang,<br>Baoan Dist, Shenzhen, China 518000<br>Tel: + 86 755 2335 3855 Fax: + 86 755 2335 3855 | DESIGN | CHECK | CHECK | APPROVAL |
|                                                                                                                                                                                                                                     |        |       |       |          |

|                                                                                                               |           |                                |                                    |       |
|---------------------------------------------------------------------------------------------------------------|-----------|--------------------------------|------------------------------------|-------|
| <br>CRE Communication Limited | Datasheet |                                | DS10-E008<br>Final Rev.:2010.07.29 |       |
|                                                                                                               | Product   | SFP+ transceiver<br>OE serials | Ver.                               | 000   |
|                                                                                                               | Part No.  | OEB6Cxx41                      | Rev.                               | 000   |
|                                                                                                               |           |                                | Page                               | 6 / 8 |

## 10. Pin Descriptions

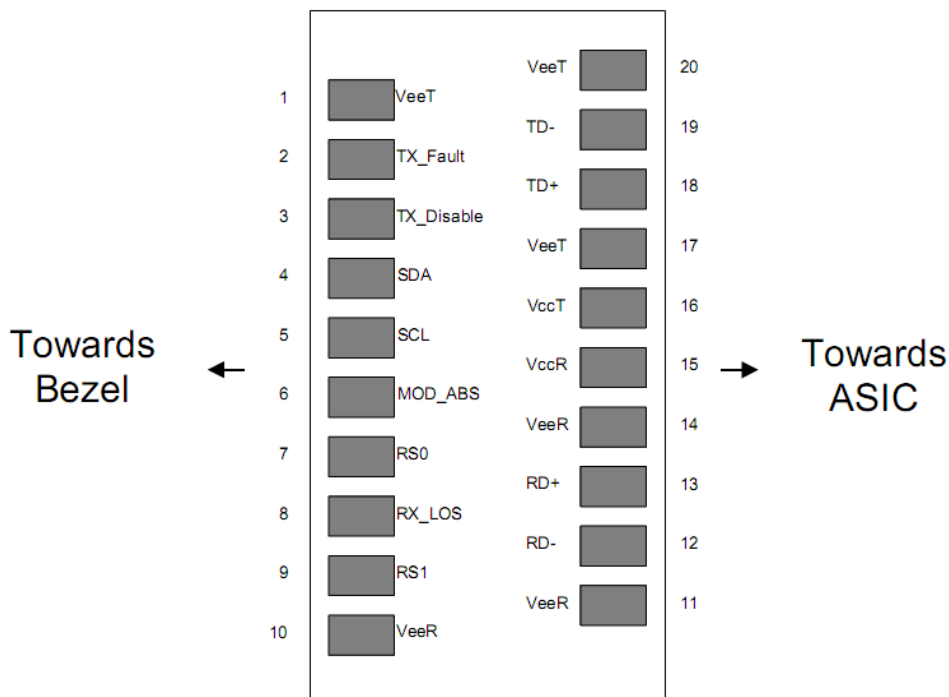

| Pin | Signal Name      | Description                               | Plug Seq. | Notes  |
|-----|------------------|-------------------------------------------|-----------|--------|
| 1   | V <sub>EET</sub> | Transmitter Ground                        | 1         |        |
| 2   | TX FAULT         | Transmitter Fault Indication              | 3         | Note 1 |
| 3   | TXDISABLE        | Transmitter Disable                       | 3         | Note 2 |
| 4   | SDA              | SDA Serial Data Signal                    | 3         |        |
| 5   | SCL              | SCL Serial Clock Signal                   | 3         |        |
| 6   | MOD_ABS          | Module Absent. Grounded within the module | 3         |        |
| 7   | RS0              | Not Connected                             | 3         |        |
| 8   | LOS              | Loss of Signal                            | 3         | Note 3 |
| 9   | RS1              | Not Connected                             | 3         |        |
| 10  | V <sub>EER</sub> | Receiver ground                           | 1         |        |
| 11  | V <sub>EER</sub> | Receiver ground                           | 1         |        |
| 12  | RD-              | Inv. Received Data Out                    | 3         | Note 4 |
| 13  | RD+              | Received Data Out                         | 3         | Note 4 |
| 14  | V <sub>EER</sub> | Receiver ground                           | 1         |        |
| 15  | V <sub>CCR</sub> | Receiver Power Supply                     | 2         |        |
| 16  | V <sub>CCT</sub> | Transmitter Power Supply                  | 2         |        |
| 17  | V <sub>EET</sub> | Transmitter Ground                        | 1         |        |

OCRE COMMUNICATION LIMITED

Web: [www.ocrecom.com](http://www.ocrecom.com)

E-Mail: [sales@ocrecom.com](mailto:sales@ocrecom.com)

Add. Dist.A, Building 6, Bay on the six block, Xixiang,  
Baoan Dist, Shenzhen, China 518000

Tel: + 86 755 2335 3855 Fax: + 86 755 2335 3855

DESIGN

CHECK

CHECK

APPROVAL

|                                                                                                               |           |                                |                                    |       |
|---------------------------------------------------------------------------------------------------------------|-----------|--------------------------------|------------------------------------|-------|
| <br>CRE Communication Limited | Datasheet |                                | DS10-E008<br>Final Rev.:2010.07.29 |       |
|                                                                                                               | Product   | SFP+ transceiver<br>OE serials | Ver.                               | 000   |
|                                                                                                               | Part No.  | OEB6Cxx41                      | Rev.                               | 000   |
|                                                                                                               |           |                                | Page                               | 7 / 8 |

|    |                  |                       |   |        |
|----|------------------|-----------------------|---|--------|
| 18 | TD+              | Transmit Data In      | 3 | Note 5 |
| 19 | TD-              | Inv. Transmit Data In | 3 | Note 5 |
| 20 | V <sub>EET</sub> | Transmitter Ground    | 1 |        |

Notes:

Plug Seq.: Pin engagement sequence during hot plugging.

1) TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and V<sub>cc</sub>+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.


2) Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.

3) LOS is open collector output. Should be pulled up with 4.7k~10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

4) RD-/+ : These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.

5) TD-/+ : These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module.


## 11. Recommended Interface Circuit

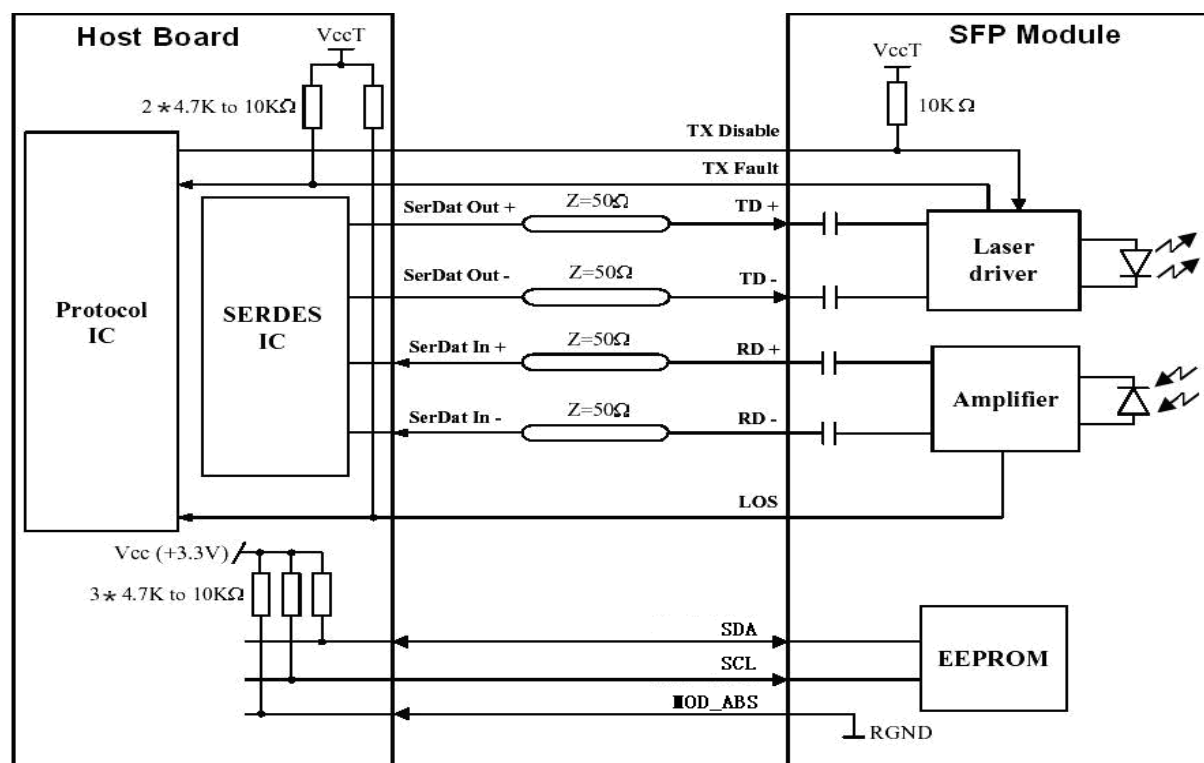

|                                                                                                                                                                                                                                     |        |       |       |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------|-------|----------|
| OCRE COMMUNICATION LIMITED<br>Web: www.ocrecom.com<br>E-Mail: sales@ocrecom.com<br>Add. Dist.A, Building 6, Bay on the six block, Xixiang,<br>Baoan Dist, Shenzhen, China 518000<br>Tel: + 86 755 2335 3855 Fax: + 86 755 2335 3855 | DESIGN | CHECK | CHECK | APPROVAL |
|                                                                                                                                                                                                                                     |        |       |       |          |

|                                                                                                               |           |                                |                                    |       |
|---------------------------------------------------------------------------------------------------------------|-----------|--------------------------------|------------------------------------|-------|
| <br>CRE Communication Limited | Datasheet |                                | DS10-E008<br>Final Rev.:2010.07.29 |       |
|                                                                                                               | Product   | SFP+ transceiver<br>OE serials | Ver.                               | 000   |
|                                                                                                               | Part No.  | OEB6Cxx41                      | Rev.                               | 000   |
|                                                                                                               |           |                                | Page                               | 8 / 8 |

## 12. Mechanical Dimensions

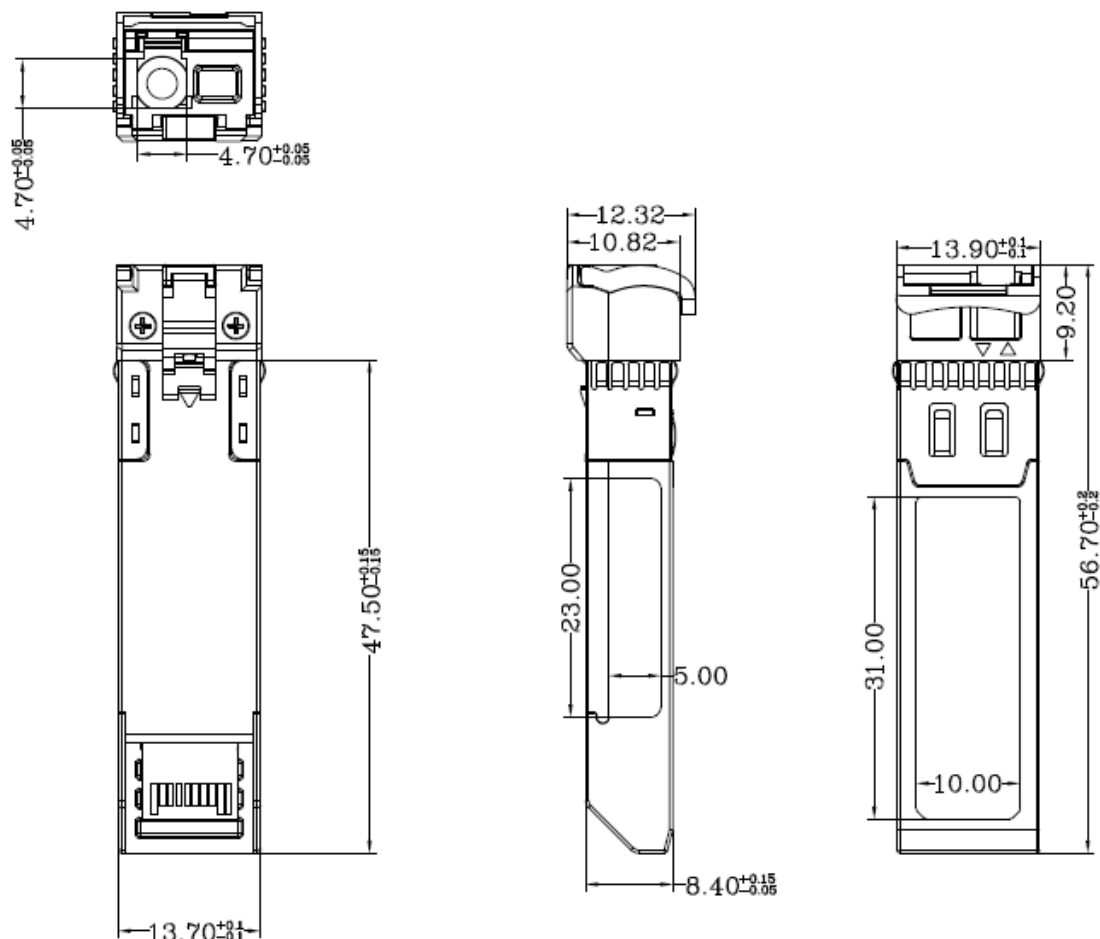

## 13. Model Ordering Information

| PN        | Description                                         |
|-----------|-----------------------------------------------------|
| OEB6C0341 | SFP+ Bi-Di Tx1270nm/Rx1310nm 10KM LC DDMI 0~70 °C   |
| OEB6C3041 | SFP+ Bi-Di Tx1330nm/Rx1270nm 10KM LC DDMI 0~70 °C   |
| OEB6C0342 | SFP+ Bi-Di Tx1270nm/Rx1310nm 10KM LC DDMI -40~85 °C |
| OEB6C3042 | SFP+ Bi-Di Tx1330nm/Rx1270nm 10KM LC DDMI -40~85 °C |

|                                                                                                                                                                                                                                     |        |       |       |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------|-------|----------|
| OCRE COMMUNICATION LIMITED<br>Web: www.ocrecom.com<br>E-Mail: sales@ocrecom.com<br>Add. Dist.A, Building 6, Bay on the six block, Xixiang,<br>Baoan Dist, Shenzhen, China 518000<br>Tel: + 86 755 2335 3855 Fax: + 86 755 2335 3855 | DESIGN | CHECK | CHECK | APPROVAL |
|                                                                                                                                                                                                                                     |        |       |       |          |